

AKER ELECTRONIC CO., LTD.


CompoTEK GmbH CTA631-14.7456-16-10/10/A

ASX4-14.7456M-6A160A3

Specifications

<p>1.FREQUENCY RANGE: 1-1. NOMINAL FREQUENCY 1-2. MODE 1-3. FREQUENCY TOLERANCE (at 25 ± 3°C) 1-4. FREQUENCY STABILITY(vs. 25°C)</p>	<p>14.745600 MHz Fundamental ± 10 PPM ± 10 PPM</p>
<p>2. ENVIRONMENTAL CONDITIONS : 2-1. OPERATING TEMPERATURE RANGE 2-2. STORAGE TEMPERATURE RANGE 2-3. AGING RATE</p>	<p>-20°C ~ +70°C - 55°C ~ + 125°C ± 3 PPM / Year</p>
<p>3. ELECTRICAL SPECIFICATIONS : 3-1. TEST CIRCUIT 3-2. LOAD CAPACITANCE 3-3. DRIVE LEVEL 3-4. EQUIVALENT SERIES RESISTANCE 3-5. SHUNT CAPACITANCE (Co)</p>	<p>S & A 350A with π fixture 16 pF 100 μW 60 Ω (MAX) 7 pF (MAX)</p>

MARKING

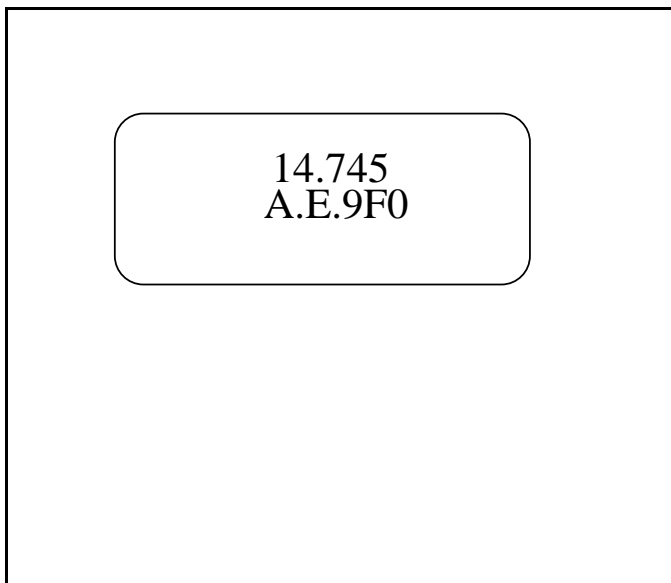

OUTLINE DIMENSION (Unit : mm)

